WE RESERVE ALL RIGHTS IN THIS DOCUMENT AND IN THE INFORMATION CONTAINED THERIN. REPRODUCTION, USE OR DISCLOSURE TO THIRD PARTIES WITHOUT EXPRESS AUTHORITY IS STRICTLY FORBIDDEN!

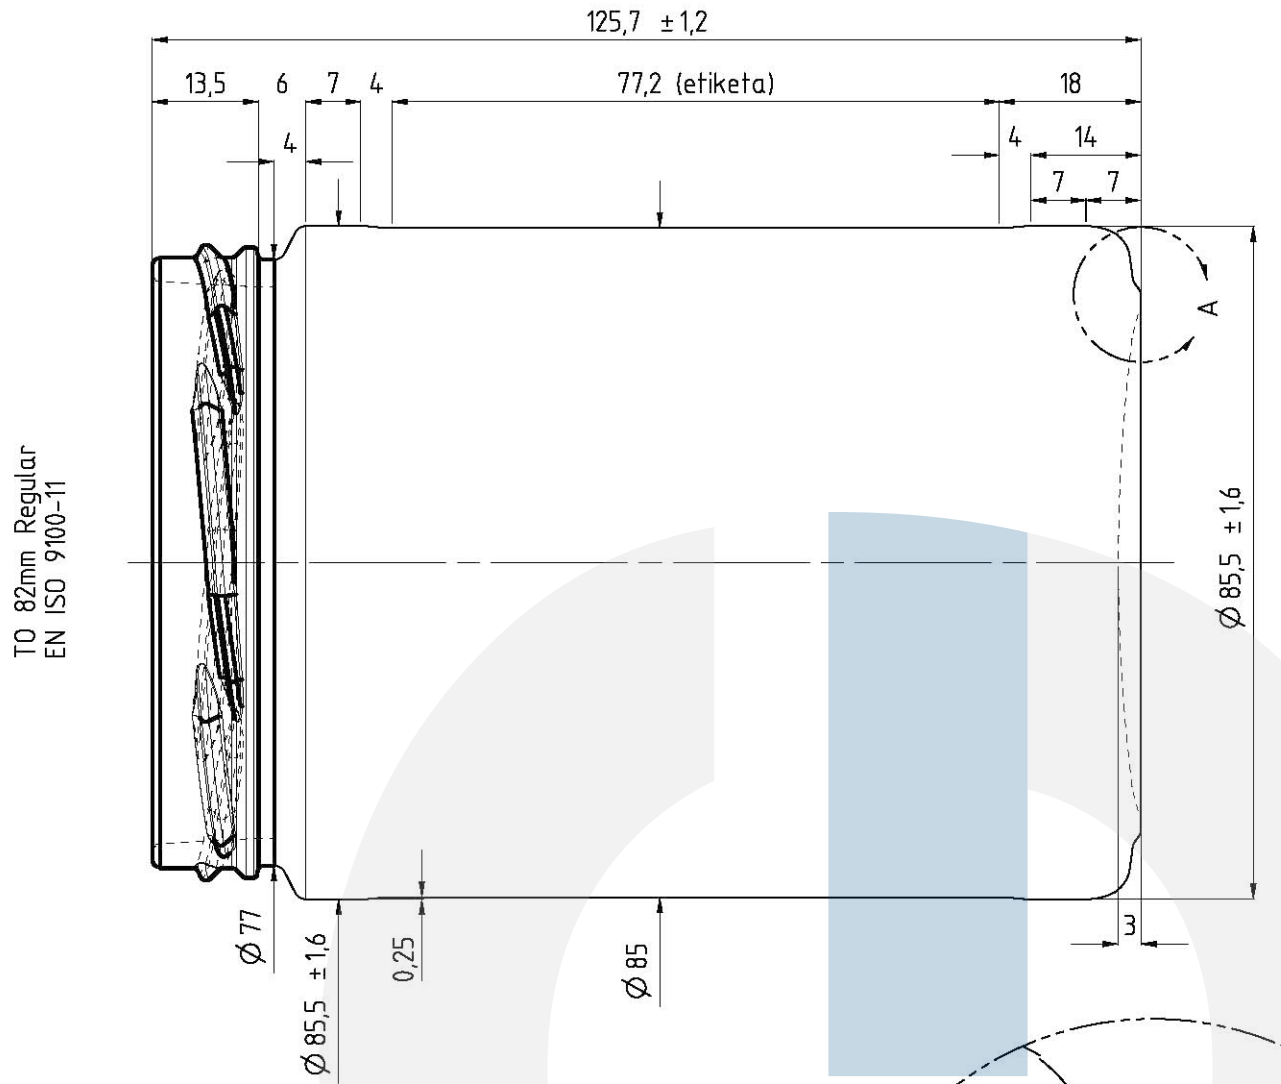

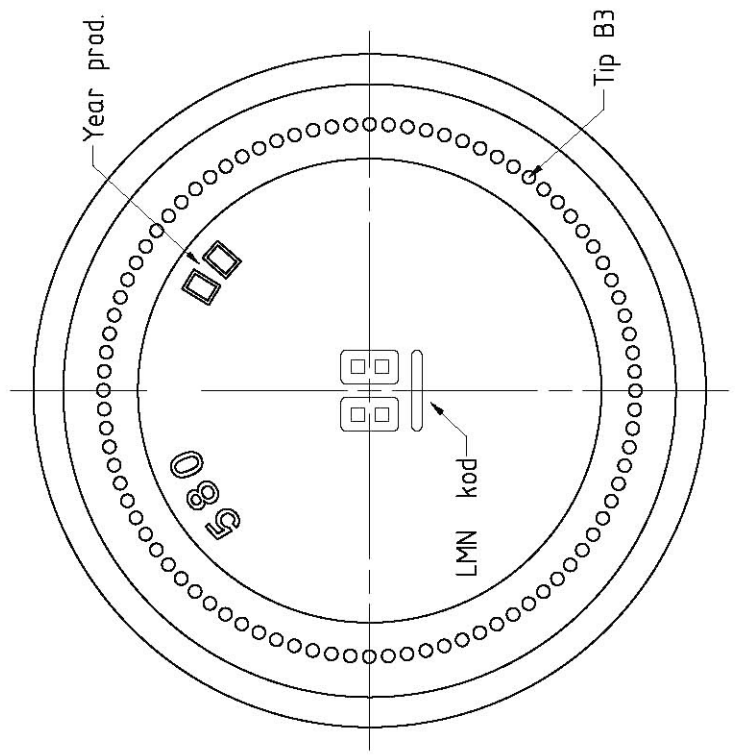

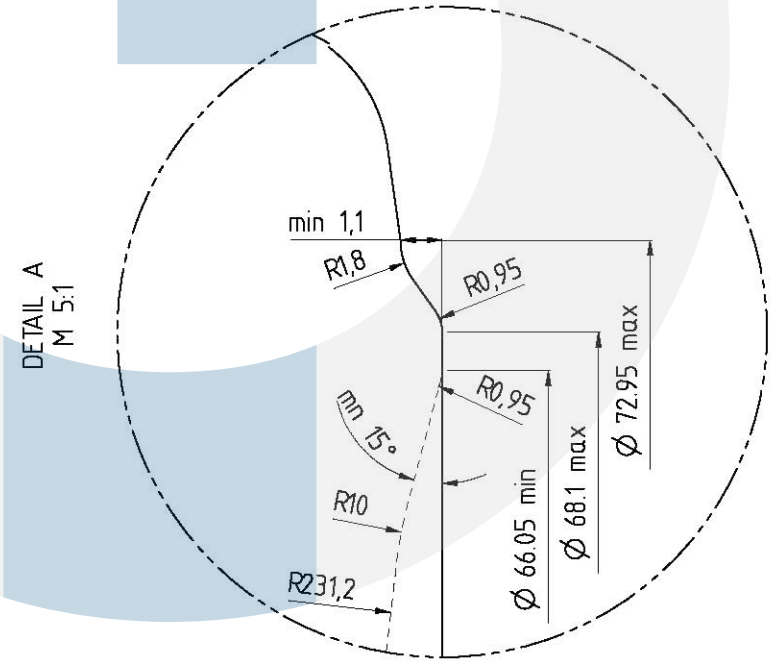

INDEX	PROMJENE / modifications	DAT	NAME

PT ODOBREN / PT approved		DAT	VIS
PtP ODOBREN / FtB released	STAKLANA	DAT	VIS
	STAKLANA	DAT	VIS
FS ODOBREN / FS approved	STAKLANA	DAT	VIS

NETOLERIRANE MJERE
PERMA DIN 6129

dimensions without tolerances
conform to standard DIN 6129

TEMP. PUNJENJA / Filling temperature	≤ 80 °C		
TEMPERATURA OBRADE / Conditioning temperature	≤ 85 °C		
SADRZAJ CO_2 / CO_2 content	≤ g/l		
SADRZAJ ALKOHOLA / Alcohol content	≤ Vol%		
PRITISAK ZATVARANJA / Axial pressure	180 daN		
UPOTREBA / Disposal	MW	AW	EW X
PROCES / Process	BB	PB X	EPB

NAZIVNI SADRZAJ / Capacity fillpoint	ml ± ml
SADRZAJ DO VRHA / Capacity brimful	580 ml ± 15 ml
TEZINA / Approx. glass weight	262 g
PROSJECNA DEBLJINA STIJENKE / Average wall thickness	2,72 mm
PROMJER VRATA / Neck connection dia.	77 mm
MIN PROLAZ KROZ VRAT / Min. through bore	66 mm
BOJA / Color	WE

NAPOMENA / Remarks	PD-VST-2019-(B)-0000564
KUPAC / Customer	Standard
SLICNO SA / Similar to	
MIJENJA BR / Replace No	
PONUDA BROJ / Offer No	E6N0616.0580.6141_D
MJERILO / Scale	1:1
KONSTR / Des	Hs
DAT	28.01.20
TIP PODATKA / Filetyp	AZ

CENTERGLASSLINE

NAZIV ARTIKLA / Designation
ELEGANT 262g TO82RH 580ml

BR. ARTIKLA / Item No
6N084.0580.6141

INDEX
A

FUER DIESES DOKUMENT UND DEN DARIN DARGESTELLTEN GEGENSTAND BEHALTEN WIR UNS ALLE RECHTE VOR! VERVIELFAELTIGUNGEN, BEKANNTGABE AN DRITTE ODER VERWENDUNG SEINES INHALTS SIND OHNE UNSERE AUSDRUECKLICHE ZUSTIMMUNG VERBOTEN!

Date: 21-Feb-20 Time: 13:29 Message: Vetropack to SAP released drawing: Original is archived at the designoffice